



AMIRCO  
**MAX**<sup>TM</sup>

**POWER TOOLS, AIR COMPRESSORS,  
AND WELDING MACHINES**



# AIR COMPRESSORS

## DIRECT DRIVEN AIR COMPRESSORS



MODEL	SA-0310	ZA-2024	ZA-2030	ZA-2050
Max. Pressure	8 bar	8 bar	8 bar	8 bar
Tank Volume	10L	24L	30L	50L
Air Displacement	138L/min	170L/min	170L/min	186L/min
Rated Power	1HP	2HP	2HP	2.5HP
Mains Voltage	220V	220V	220V	220V
Frequency	50Hz	50Hz	50Hz	50Hz

# AIR COMPRESSORS

## OIL FREE AIR COMPRESSORS



MODEL	SYW-550W-10	SYW-550W-30	SYW-550W-50	SYW-550W*2-50
Max. Pressure	8 bar	8 bar	8 bar	8 bar
Tank Volume	10L	30L	50L	50L
Air Displacement	40L/min	40L/min	60L/min	80L/min
Rated Power	550W	550W	550W	1100W
Mains Voltage	220V	220V	220V	220V
Frequency	50Hz	50Hz	50Hz	50Hz

# AIR COMPRESSORS

## BELT DRIVEN AIR COMPRESSORS



MODEL	BD-50L	BD-60L	BD-90L	BD-120L	BD-180L	BD-230L
Max. Pressure	8 bar	8 bar	8 bar	8 bar	8 bar	8 bar
Tank Volume	50L	60L	90L	120L	180L	230L
Air Displacement	36L/min	250L/min	250L/min	360L/min	360L/min	390L/min
Rated Power	2HP	2HP	3HP	3HP	4HP	4HP
Mains Voltage	220V	220V	220V	220V	220V	220V
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz

# WELDING MACHINES

## CAMEL



MODEL	MMA200I	MMA250I	MMA300I	MMA200M	MMA250M
Rated Input Voltage (V)	220V±15%	220V±15%	220V±15%	220V±15%	220V±15%
Efficiency	35%	35%	60%	60%	60%
Rated Input Current	21A	24.5A	28A	24.5A	24.5A
Power Factor	85%	85%	85%	85%	85%
Input Frequency (Hz)	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Protection Grade	F	F	F	F	F
Rated Input Power (KVA)	4.6 KVA	5.5 KVA	7.2 KVA	5.5 KVA	7.2 KVA
Weight (Kg)	9 Kg	9 Kg	9.5 Kg	11.5 Kg	11.5 Kg
Current Range	20A - 200A	20A - 200A	20A - 250A	20A - 200A	20A - 250A
Electrode Available (MM)	1.6MM - 3.2 MM	1.6MM - 4.0 MM	1.6MM - 4.0 MM	1.6MM - 4.0 MM	1.6MM - 4.0 MM
Dimensions	470*195*335 mm	470*195*335 mm	470*195*335 mm	470*195*335 mm	470*195*335 mm

# WELDING MACHINES

## CAMEL



MODEL	Ws200	Ws250	MMA315	MMA400	MIG250	MIG400
Rated Input Voltage (V)	220V±15%	220V±15%	380V±15%	380V±15%	220V±15%	380V±15%
Efficiency	60%	60%	60%	60%	80%	80%
Rated Input Current	28A	28A			21A	21A
Power Factor	85%	85%	85%	85%	85%	85%
Input Frequency (Hz)	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Protection Grade	F	F	F	F	F	F
Rated Input Power (KVA)	7.2 KVA	7.2 KVA	9.9 KVA	18.2 KVA	12.1 KVA	14 KVA
Weight (Kg)	13.5 Kg	13.5 Kg	19 Kg	19 Kg	33 Kg	36 Kg
Current Range	20A - 250A	20A - 250A	20A - 315A	20A - 400A	20A - 250A	20A - 400A
Electrode Available (MM)	1.6MM - 4.0 MM	1.6MM - 4.0 MM	1.6MM - 4.0 MM	1.6MM - 5.0 MM	50A - 250A	60A - 400A
Dimensions	460*265*335 mm	460*265*335 mm	426*212*357 mm	565*306*502 mm	655*300*665 mm	550*280*545 mm

# WELDING MACHINES

## CAMEL



MODEL	MMA200	MMA250	MMA300
Rated Input Voltage (V)	1ph, 160-250V, 50/60Hz	1ph, 160-250V, 50/60Hz	1ph, 160-250V, 50/60Hz
Efficiency	60%	60%	60%
Rated Input Current			
Power Factor	85%	85%	85%
Input Frequency (Hz)	50 Hz	50 Hz	50 Hz
Protection Grade	F	F	F
Rated Input Power (KVA)	7.6 KVA	8.7 KVA	9.4 KVA
Weight (Kg)	7 Kg	7.4 Kg	7.7 Kg
Current Range	20A - 200A	20A - 250A	20A - 300A
Electrode Available (mm)	1.6 - 4.0	1.6 - 4.0	1.6 - 5.0
Dimensions (cm)	44 x 24 x 38	44 x 24 x 38	44 x 24 x 38

# POWER TOOLS



MODEL	Cd10	CID13A	CAG 6-100	CAG 801
Rated Input Voltage	220V	220V	220V	220V
Power	350W	500W	670W	850W
RPM	2600	2600	11000	11000
Diameter	10 mm	13 mm	100 mm	100 mm




# POWER TOOLS



<b>MODEL</b>	<b>CCM355</b>	<b>CDH16</b>	<b>CM4SA</b>
<b>Rated Input Voltage</b>	<b>220V</b>	<b>220V</b>	<b>220V</b>
<b>Power</b>	<b>2200W</b>	<b>1400W</b>	<b>1200W</b>
<b>RPM</b>	<b>3800</b>	<b>1400</b>	<b>11000</b>
<b>Diameter</b>	<b>355 mm</b>	<b>30 mm</b>	<b>100 mm</b>

# AIR COMPRESSORS

## BELT DRIVEN AIR COMPRESSORS

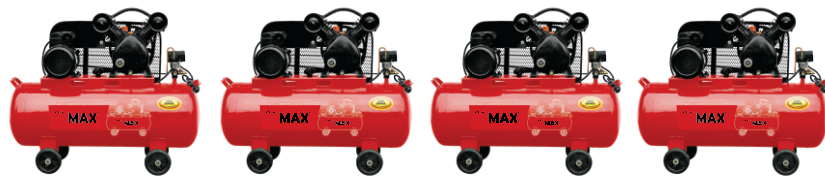

MODEL	AC MAX 90 L	AC MAX 120 L	AC MAX 180 L	AC MAX 230 L
Max. Pressure	8 bar	8 bar	8 bar	8 bar
Tank Volume	90L	120L	180L	230L
Air Displacement	250L/min	360L/min	360L/min	390L/min
Rated Power	3HP	3HP	4HP	4HP
Mains Voltage	220V	220V	220V	220V
Frequency	50Hz	50Hz	50Hz	50Hz

# AIR COMPRESSORS

## DIRECT DRIVEN AIR COMPRESSORS



MODEL	AC MAX 24 L	AC MAX 30 L	AC MAX 50 L
Max. Pressure	8 bar	8 bar	8 bar
Tank Volume	24L	30L	50L
Air Displacement	170L/min	170L/min	186L/min
Rated Power	2HP	2HP	2.5HP
Mains Voltage	220V	220V	220V
Frequency	50Hz	50Hz	50Hz

# WELDING MACHINES

## AMRCO MAX



MODEL	MMA200	MMA250	MMA300	MMA400
Rated Input Voltage (V)	1ph, 220V, 50/60Hz	1ph, 220V, 50/60Hz	1ph, 220V, 50/60Hz	380V $\pm$ 15%
Efficiency	60%	60%	60%	60%
Rated Input Current				
Power Factor	85%	85%	85%	85%
Input Frequency (Hz)	50 Hz	50 Hz	50 Hz	50 Hz
Protection Grade	F	F	F	F
Rated Input Power (KVA)	7.6 KVA	8.7 KVA	9.4 KVA	18.2 KVA
Weight (Kg)	7 Kg	7.4 Kg	7.7 Kg	15 Kg
Current Range	20A - 200A	20A - 250A	20A - 300A	20A - 400A
Electrode Available (mm)	1.6 - 3.2	1.6 - 3.2	1.6 - 4.0	1.6 - 5.0
Dimensions (cm)	47 x 19 x 33	47 x 19 x 33	47 x 19 x 33	56 x 30 x 50